



Desktop Printers RT863i



600 DPI superior printing quality on desktop printer

RT863i is most compact 600dpi with 300m ribbon desktop printer market. Equipped with leading technologies, RT863i performs the highest class of printing quality on affordable price.



Enlarged touch screen panel for intuitive and easy operation



Multiple interface plus optional WiFi, bluetooth for easy integration



Innovative "C" button makes label Calibration simple and fast



Preliminary Specifications

RT863i

Desktop Printer



BSR idware GmbH

Jakob-Haringer-Str.3

A-5020 Salzburg

<https://www.bsr.at>

sales@bsr.at

Model		RT863i
Print Method		Thermal Transfer / Direct Thermal
Resolution		600 dpi (24 dots/mm)
Print Speed		3 IPS (76.2 mm/s)**
Print Width		4.16" (105.6 mm)
Print Length		Min. 0.16" (4 mm)**; Max. 15" (381 mm)
Processor		32 Bit RISC CPU
Memory	Flash	128 MB Flash
		(60 MB for user storage)
	SDRAM	32 MB
Sensor Type		Adjustable reflective sensor (full range). Fixed transmissive sensor, central aligned
	Types	Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming
	Width	Min. 0.79" (20.0 mm) – Max. 4.64" (118 mm)
Media	Thickness	Min. 0.003" (0.076 mm) – Max. 0.008" (0.20 mm)
	Label Roll Diameter	Max. 5" (127 mm)
	Core Diameter	1" (25.4 mm), 1.5" (38.1 mm)
	Types	Wax, wax / resin, resin
	Length	984.25' (300 m)
Ribbon	Width	1.18" Min. - 4.33" (30 mm - 110 mm) Max.
	Ribbon Roll Diameter	2.67" (68 mm)
	Core Diameter	1" (25.4 mm)
Printer Language		EZPL, GEPL, GZPL auto switch
	Label Design Software	GoLabel (for EZPL only)
Software	Driver	Windows 2000, XP, Vista, Windows 7, 8.1 and 10, Windows Server 2003 & 2008, MAC, Linux
	DLL	Win CE, .NET, Android, Windows Mobile, Windows 2000 / XP / VISTA / Windows 7 / Windows 8.1/Windows 10
Resident Fonts	Bitmap Fonts	Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable Bitmap fonts 8 times expandable in horizontal and vertical directions
	TTF Fonts	TTF Fonts (Bold / Italic / Underline). 0°, 90°, 180°, 270° rotatable
	Bitmap Fonts	Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable
Download Fonts	Asian Fonts	16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese (GB2312), Japanese (S-JIS), Korean (KS-X1001)
	TTF Fonts	90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions TTF Fonts (Bold / Italic / Underline). 0°, 90°, 180°, 270° rotatable
Barcodes	1-D Bar codes	China Postal Code, Codabar, Code 11, Code 32, Code 39, Code 93, Code 128 (subset A, B, C), EAN-8, EAN-13, EAN 8/13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5, Interleaved 2-of-5 (I 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT – 128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Random Weight, Standard 2 of 5, Telepen, UPC-A, UPC-E, UPC-A and UPC-E with EAN 2 or 5 digit extension, UCC 128, UCC/EAN-128 K-Mart
	2-D Bar codes	Aztec code, Code 49, Codablock F, Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417, QR code, TLC 39
Code Pages		CODEPAGE 437, 737, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8, UTF16BE, UTF16LE
Graphics		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software
Interfaces		Serial port: RS-232 (DB-9) USB Device port (B-Type) IEEE 802.3 10/100 Base-Tx Ethernet port (RJ-45) USB Host (A-Type) Parallel Port (Mini-Centronics)
Control Panel		Backlight 3.2" Touch Screen LCD Calibration button Control Key : FEED Power on/standby button
Power		Switching power 100-240VAC, 50-60Hz input
Environment	Operation Temperature	41°F to 104°F (5°C to 40°C)
	Storage Temperature	-4°F to 140°F (-20°C to 60°C)
	Humidity	25-85%, non-condensing.
	Storage	10-90%, non-condensing.
Agency Approvals		CE (EMC), FCC Class A, CB, UL, cUL
	Length	11.0" (280 mm)
Dimension	Height	7.7" (195 mm)
	Width	8.3" (210 mm)
Weight		5.9 lbs (2.7 Kg), excluding consumables
Options		Label dispenser Cutter External label unwind Stand External label rewinder Bluetooth Wireless LAN (IEEE 802.11 b/g/n) Real Time Clock (RTC)

*Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

**Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

Applications

Applications for Labels & Barcodes

RT863i are the ultimate tool for barcode printings in any industry.



Cosmetics

Shelf labels, product serial number labels, ingredients contents labels.



Health Care

Tube tags, pharmaceutical labels, patient identification, medical records and laboratory specimen tags.



Retail

Price tags, content labels, jewelry labels, courier tracking label, receipts for registered mails, bills of landing (B / L), postage labels, etc.


GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User Friendly

GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel is the first-choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

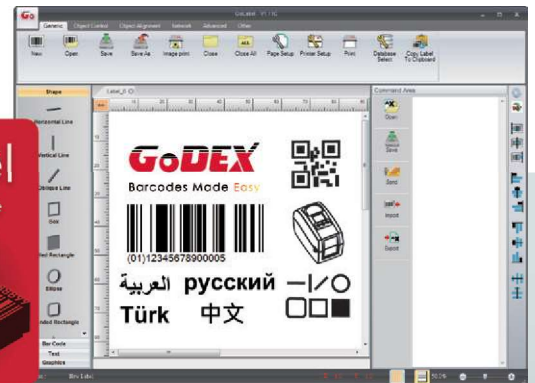

GoDEX

RIBBONS

High quality original GoDEX thermal transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge

