


2D Desktop scanner XL-2310



- ⊗ Support USB, PS2, RS-232 interface
- ⊗ Suitable for POS terminals, ticket validators
- ⊗ Wide field-of-view, omni-directional scanning capability
- ⊗ High speed and reliable performance on common codes
- ⊗ Compatible with Linux, Android, Windows XP/7/8/10/MAC OS

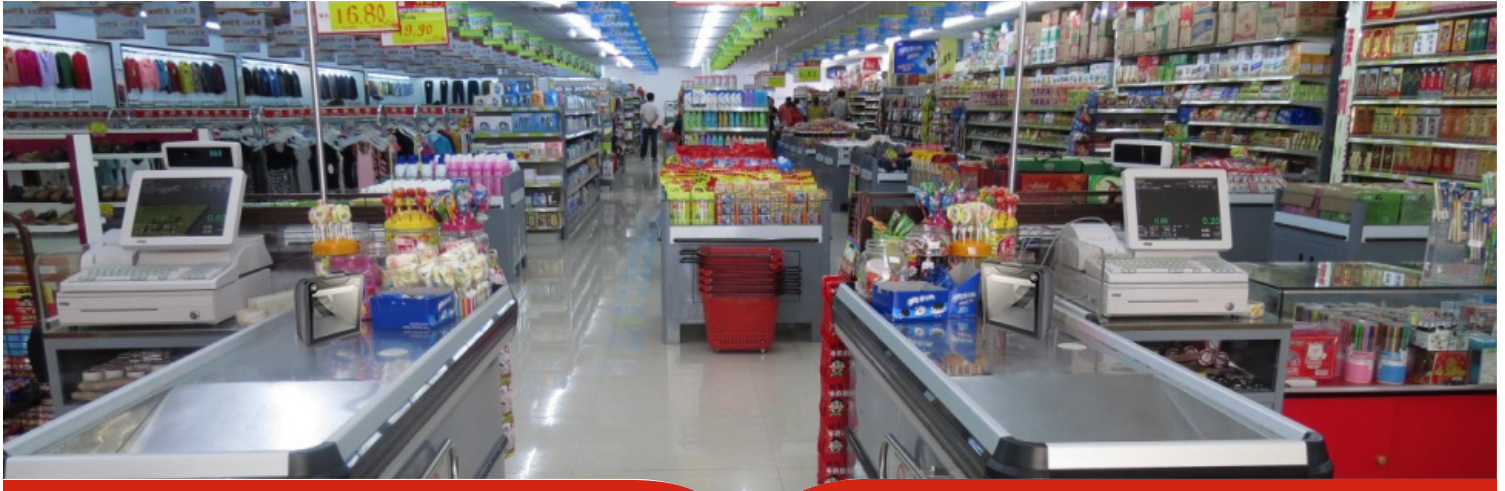

Model	XL-2310	Cable	Straight 2.0m
Light Source	Red LED (Lighting) Color	Mobile tolerance	1m/s
CPU	32bit ARM	Compatible system	Compatible with Linux, Android, Windows XP/7/8/10/MAC OS
Scan Mode	Continue scanning	Input Voltage	DC 5V
Image Size	1280x800 pix	Working current	< 420mA
Scanning speed	60 fps	stand-by current	< 175mA
Decoding Depth	0~350mm@(13mil UPC/EAN 100%,PCS=90%)	Indicator	Tone and Volume adjustable
Mnimum Resolution	≥4mil	Interface	USB-HID、USB-VCP、RS-232
Scanning angle	Deflection 360° Inclination ±65° Rotation ±60°	Temperature (Operating)	-10°C~50°C
Size	L × W × H:152×152×77.9mm)	Temperature (Storage)	-20°C~60°C
Weight	554g	Humidity	5% to 95% (non-condensing)
Case Material	ABS+PC, Flame Retardant Material	Light Levels	0~5000Lux (fluorescence), 0-100,000 Lux (sunlight)
Decoding Capability	1D:Codabar、Code11、Code39、Code32、Interleaved 2 of 5、Industrial 2 of 5、Matrix 2 of 5、Code93、Code128、GS1-128、UPC-A、UPC-E、EAN 8、EAN 13、GS1 DataBar (RSS14)、GS1 DataBar Limited、GS1 DataBar Expanded、2D: PDF417、Micro PDF417、QR Code、Micro QR、Data Matrix、Aztec Code		



SUNLUX IOT Technology (Guangdong) Inc.

Office Add: 4F,No.7 ,Kehui First Street ,Science Road,Science City,Guangzhou,China
Tel: +86-20-32053765 Fax: +86-20-82115390 Site: www.xl-scan.com E-mail: sales@xl-scan.com