


Rugged Tablet PC

EM-I16HH

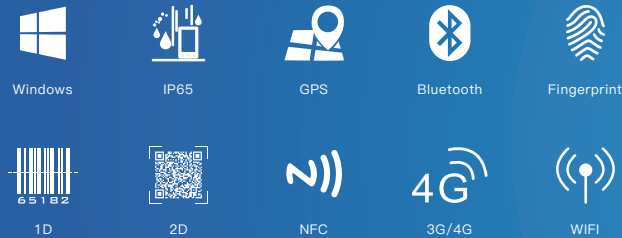

Functions

- Support for Windows 10 system
- Optional 3G/4G all network communication, WiFi, Bluetooth and other communication modes
- 10000mAh battery, 9.5 hours of machine endurance
- IP65 high protection level, in accordance with MIL-STD-810G
- Support GPS, more accurate positioning
- Support 5 million pixel auto focus camera, easy to collect images and video information
- Support 1D/2D, NFC, ID card and other functional modules for free selection

Product Six Views



* All technical data, specification and performance figures subject to change without notice.

Specification Parameter

Basic parameters

Dimension	280.4 x 187 x 26.6mm
Weight	Device unit 1014g
Device Color	Black
LCD	10.1 inch IPS 16:10, 800x1280, 700nits (Optional 1920x1200)
Touch Panel	10 point G+G capacitive touch screen Corning® Gorilla® Glass, 930 stylus
Camera	Front 2.0MP Rear 5.0MP
I/O	HDMI 1.4a x 1, USB 2.0 Type-A x 1, Micro USB x 1, SIM Card x 1, TF Card x 1, 12pins Pogo Pin x 1, DB9 RS232 x 1, RJ45 x 1, Φ3.5mm standard earphone jack x 1, Φ3.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz, Output DC 5V/3A

Communication

WIFI	WiFi 802.11 a/b/g/n/ac (2.4G+5.8G)
Bluetooth	BT4.2 Transmission distance: 10m
3G/4G (Optional)	LTE FDD: B1/B3/B5/B7/B8/B20/B40 WCDMA: B1/B5/B8 GSM: 900/1800 Optional EC25-AU
GNSS	Support GPS

Accessories



Docking Charger



Removable Battery



Back-strap



Shoulder-strap



Leather Cover



Car Charge



Vehicle Mount

Application Range

Various modules and accessories can be selected to meet customers' application in various industries.



Equipment Testing



Industrial Automation



Vehicle



Medical Treatment

Performance parameter

CPU	Intel Atom x5 Z8350
OS	Windows 10
RAM	4GB
ROM	64GB/128GB

Battery

Capacity	3.7V/10000mAh
Type	Li_polyment, removeable battery
Endurance	9.5hrs (50% volume sounds, 50% screen brightness, 1080P HD video display by default)

Data Collection

NFC	Optional, 13.56MHz, Support ISO/IEC 14443A/B/15693/18092 protocols Card reading distance: 4cm
1D	Optional, Optical resolution: 5mil/ scan speed: 50 times/s
2D	Optional, Optical resolution: 5mil/ scan speed: 50 times/s
Fingerprint	Optional

Reliability

Operate Temperature	-20 °C ~ 60 °C
Store Temperature	-30 °C ~ 70 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified, MIL-STD-810G certified
Drop Height	1.22m